
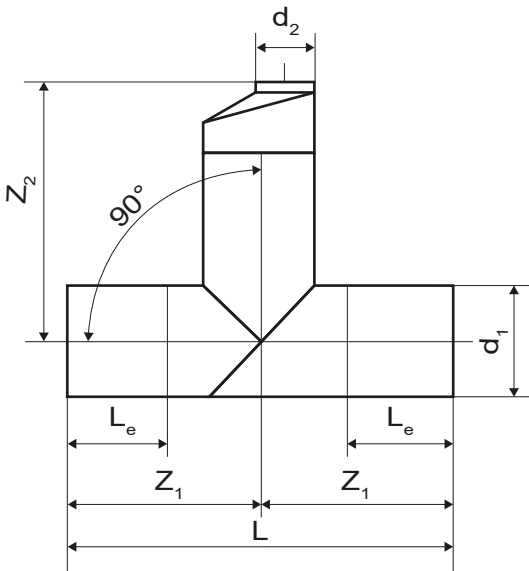


Tee Reducción 90° (±2°) Segmentada HDPE PE100

Norma DIN 16963

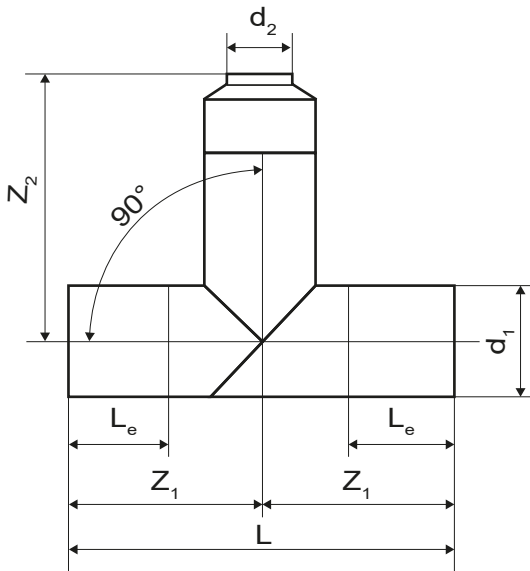

d1		d2	LE min	L*	Z1*	Z2*	
						Red. Concéntrica	Red. Excéntrica
mm	Pulgada (equiv)	mm	mm	mm	mm	mm	mm
110	4	63 a 90	150	410	205	285	285
125	5	63 a 110		430	215	315	335
140	5 1/2	75 a 125		440	220	320	340
160	6	90 a 140		460	230	330	350
180	7	90 a 160		480	240	345	365
200	8	110 a 180		500	250	355	375
225	9	125 a 200		530	265	370	390
250	10	125 a 225	250	750	375	480	500
280	11	140 a 150		780	390	495	515
315	12	160 a 280	300	920	460	585	605
355	14	160 a 315		960	480	605	625
400	16	200 a 355		1000	500	630	655
450	18	225 a 400		1050	525	655	680
500	20	250 a 450	350	1200	600	730	755
560	22	280 a 500		1260	630	760	785
630	24	315 a 560		1330	665	805	830
710	28	355 a 630		1410	705	855	880
800	32	400 a 710		1500	750	920	955
900	36	450 a 800	400	1700	850	1045	1105
1000	40	500 a 900		1800	900	1095	1155
1200	48	630 a 1000		2000	1000	1220	1255
1400	54	710 a 1200		2200	1100	1350	1395
1600	64 /66	800 a 1400		2400	1200	1500	1520

* Tolerancia ±5%
**Valores no cubiertos por la Norma DIN 16963 Parte 1.